

---

# **PyGauss Documentation**

***Release 0.5.0***

**Chris Sewell**

June 22, 2015



---

**Contents**

---

<b>1</b>	<b>Contents</b>	<b>3</b>
1.1	Quick Start . . . . .	3
1.2	Example Assessment . . . . .	4
1.3	Project Status . . . . .	17
1.4	Whats New . . . . .	18
1.5	Whats To Come . . . . .	19
1.6	User API . . . . .	19
<b>2</b>	<b>License</b>	<b>35</b>
	<b>Python Module Index</b>	<b>37</b>



<b>Author</b>	Chris Sewell
<b>Project Page</b>	<a href="https://github.com/chrisjsewell/PyGauss">https://github.com/chrisjsewell/PyGauss</a>
<b>Conda Distro</b>	<a href="https://conda.binstar.org/cjs14">https://conda.binstar.org/cjs14</a>
<b>PyPi Distro</b>	<a href="https://pypi.python.org/pypi/pygauss">https://pypi.python.org/pypi/pygauss</a>
<b>Communication</b>	<a href="mailto:pygauss@googlegroups.com">pygauss@googlegroups.com</a>

PyGauss is intended as an interactive tool for supporting the lifecycle of a computational molecular chemistry investigation. From visual and analytical exploration, through to documentation and publication.

Initially PyGauss has been designed for the purpose of examining one or more Gaussian quantum chemical computations, both **geometrically** and **electronically**. It is built on top of the `cclib/chemview/chemlab` suite of packages and python scientific stack though, and so should be extensible to other types of computational chemical analysis. PyGauss is primarily designed to be used interactively in the IPython Notebook.

As shown in the examples, a molecular optimisation can be assessed individually (much like in gaussview), but also as part of a group. The advantages of this package are then:

- Faster, more efficient analysis
- Extensible analysis
- Reproducible analysis



---

## Contents

---

## 1.1 Quick Start

### 1.1.1 OSX and Linux

The recommended was to use pygauss is to download the [Anaconda](#) Scientific Python Distribution (64-bit). Once downloaded a new environment can be created in terminal and pygauss installed in one simple line:

```
conda create -n pg_env -c https://conda.binstar.org/cjs14 pygauss
```

### 1.1.2 Windows

There is currently no pygauss Conda distributable for Windows or for chemlab, which has C-extensions that need to be built using a compiler. Therefore chemlab will need to be cloned from GitHub, its extensions built, dependancies installed and finally install pygauss.

```
conda create -n pg_env python=2.7
conda install -n pg_env -c https://conda.binstar.org/cjs14 cclib
conda install -n pg_env -c https://conda.binstar.org/cjs14 chemview
conda install -n pg_env -c https://conda.binstar.org/cjs14 pyopengl
git clone --recursive https://github.com/chemlab/chemlab.git
cd chemlab
python setup.py build_ext --inplace
conda install -n pg_env <pil, pandas, matplotlib, scikit-learn, ...>
activate pg_env
pip install . # or add to PYTHONPATH
pip install pygauss
```

### 1.1.3 Troubleshooting

If you encounter difficulties it may be useful to look in `working_conda_environments` at conda environments known to work.

### 1.1.4 Testing

Pygauss utilises a unit test suite ([nose/nose-parameterized](#)) to ensure that computations run, and are correct. Continuous integration testing of the source code is provided by [Travis CI](#) and pass completion is an automated condition of the Conda build. These unit tests can also be run manually in the command line;

```
nose tests -v --with-doctest
```

or directly in python;

```
pygauss.run_nose(verbose=True)
```

## 1.2 Example Assessment

After installing PyGauss you should be able to open this IPython Notebook from; [https://github.com/chrisjsewell/PyGauss/blob/master/Example\\_Assessment.ipynb](https://github.com/chrisjsewell/PyGauss/blob/master/Example_Assessment.ipynb), and run the following...

```
from IPython.display import display, Image
%matplotlib inline
import pygauss as pg
print 'pygauss version: {}'.format(pg.__version__)
```

```
pygauss version: 0.5.0
```

The test folder has a number of example Gaussian outputs to play around with.

```
folder = pg.get_test_folder()
len(folder.list_files())
```

```
37
```

**Note:** the *folder* object will act identical whether using a local path or one on a server over ssh (using paramiko):

```
folder = pg.Folder('/path/to/folder',
                   ssh_server='login.server.com',
                   ssh_username='username')
```

### 1.2.1 Single Molecule Analysis


A *molecule* can be created containing data about the initial geometry, optimisation process and analysis of the final configuration.

```
mol = pg.molecule.Molecule(folder_obj=folder,
                            init_fname='CJS1_emim-cl_B_init.com',
                            opt_fname=['CJS1_emim-cl_B_6-311+g-d-p-_gd3bj_opt-modredundant_difrz.log',
                                       'CJS1_emim-cl_B_6-311+g-d-p-_gd3bj_opt-modredundant_difrz_err.log',
                                       'CJS1_emim-cl_B_6-311+g-d-p-_gd3bj_opt-modredundant_unfrz.log'],
                            freq_fname='CJS1_emim-cl_B_6-311+g-d-p-_gd3bj_freq_unfrz.log',
                            nbo_fname='CJS1_emim-cl_B_6-311+g-d-p-_gd3bj_pop-nbo-full-unfrz.log',
                            atom_groups={'emim': range(20), 'cl':[20]},
                            alignto=[3,2,1])
```

#### Geometric Analysis


Molecules can be viewed statically or interactively.

```
#mol.show_initial(active=True)
vdw = mol.show_initial(represent='vdw', rotations=[[0,0,90], [-90, 90, 0]])
ball_stick = mol.show_optimisation(represent='ball_stick', rotations=[[0,0,90], [-90, 90, 0]])
display(vdw, ball_stick)
```

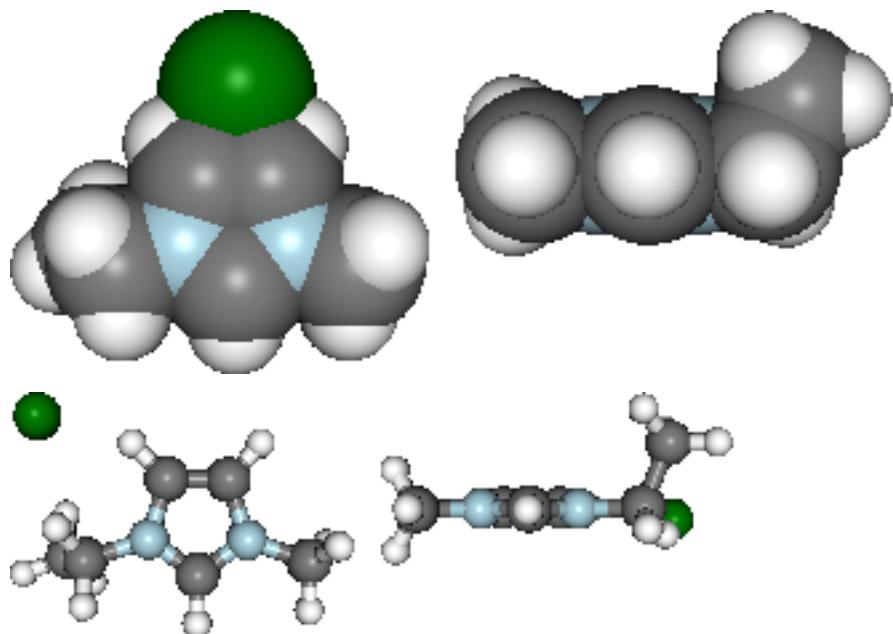

```
print 'Cl optimised polar coords from aromatic ring : ({0}, {1},{2})'.format(
    *[round(i, 2) for i in mol.calc_polar_coords_from_plane(20, 3, 2, 1)])
ax = mol.plot_opt_trajectory(20, [3, 2, 1])
ax.set_title('Cl optimisation path')
ax.get_figure().set_size_inches(4, 3)
```



Cl optimised polar coords from aromatic ring : (0.11, -116.42,-170.06)

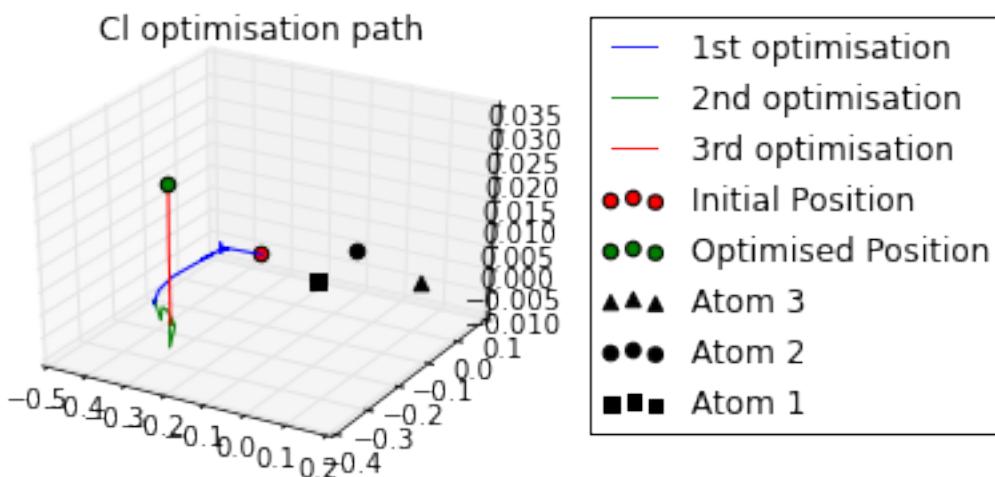

## Energetics and Frequency Analysis


```
print('Optimised? {0}, Conformer? {1}, Energy = {2} a.u.'.format(
    mol.is_optimised(), mol.is_conformer(),
    round(mol.get_opt_energy(units='hartree'),3)))
ax = mol.plot_opt_energy(units='hartree')
ax.get_figure().set_size_inches(3, 2)
ax = mol.plot_freq_analysis()
ax.get_figure().set_size_inches(4, 2)
```

```
Optimised? True, Conformer? True, Energy = -805.105 a.u.
```

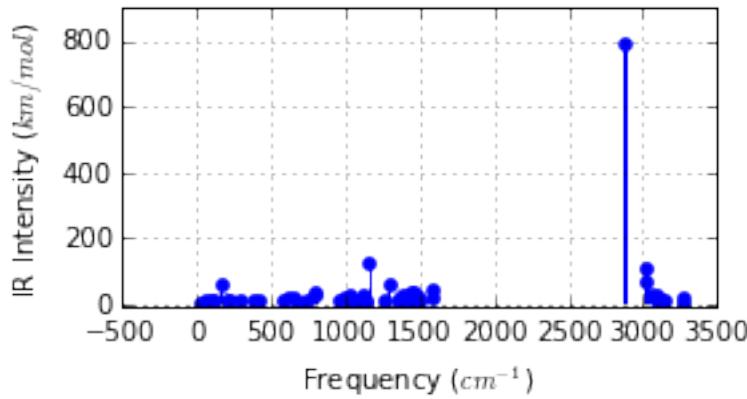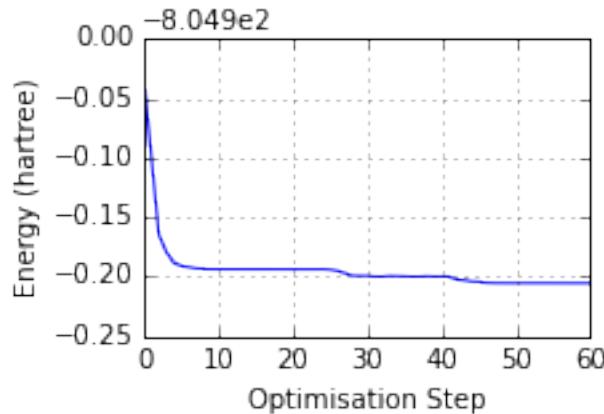

Potential Energy Scan analysis of geometric conformers...

```
mol2 = pg.molecule.Molecule(folder_obj=folder, alignto=[3,2,1],
    pes_fname=['CJS_emim_6311_plus_d3_scan.log',
               'CJS_emim_6311_plus_d3_scan_bck.log'])
ax = mol2.plot_pes_scans([1,4,9,10], rotation=[0,0,90], img_pos='local_maxs', zoom=0.5)
ax.set_title('Ethyl chain rotational conformer analysis')
ax.get_figure().set_size_inches(7, 3)
```

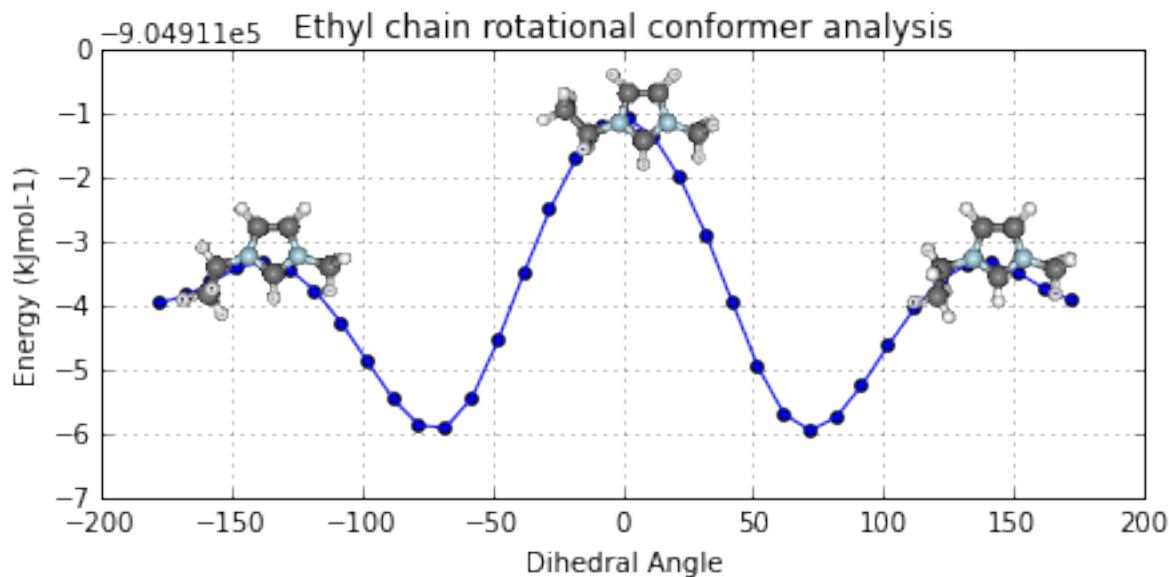


## Partial Charge Analysis

using Natural Bond Orbital (NBO) analysis

```
print '+ve charge centre polar coords from aromatic ring: ({0} {1},{2})'.format(
    *[round(i, 2) for i in mol.calc_nbo_charge_center(3, 2, 1)])
display(mol.show_nbo_charges(represent='ball_stick', axis_length=0.4,
    rotations=[[0,0,90], [-90, 90, 0]]))
```

+ve charge centre polar coords from aromatic ring: (0.02 -51.77,-33.15)

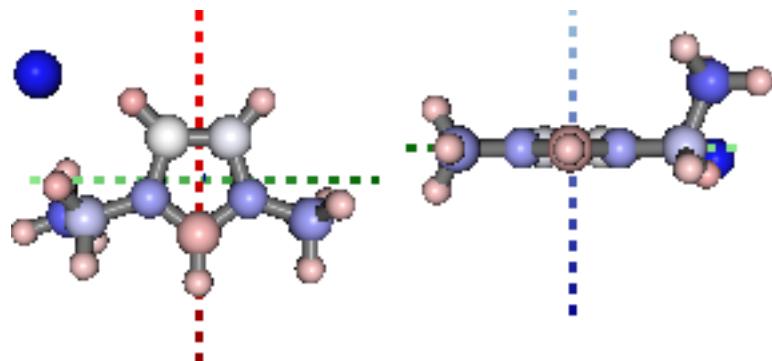


## Density of States Analysis

```
print 'Number of Orbitals: {}'.format(mol.get_orbital_count())
homo, lumo = mol.get_orbital_homo_lumo()
homoe, lumoe = mol.get_orbital_energies([homo, lumo])
print 'HOMO at {} eV'.format(homoe)
print 'LUMO at {} eV'.format(lumoe)
```

Number of Orbitals: 272  
 HOMO at -4.91492036773 eV  
 LUMO at -1.85989816817 eV

```
ax = mol.plot_dos(per_energy=1,
                   atom_groups=['cl', 'emim'],
                   group_colors=['blue', 'orange'],
                   group_labels=['Cl', 'EMIM'], group_fill=False,
                   lbound=-20, ubound=10, legend_size=12)
```

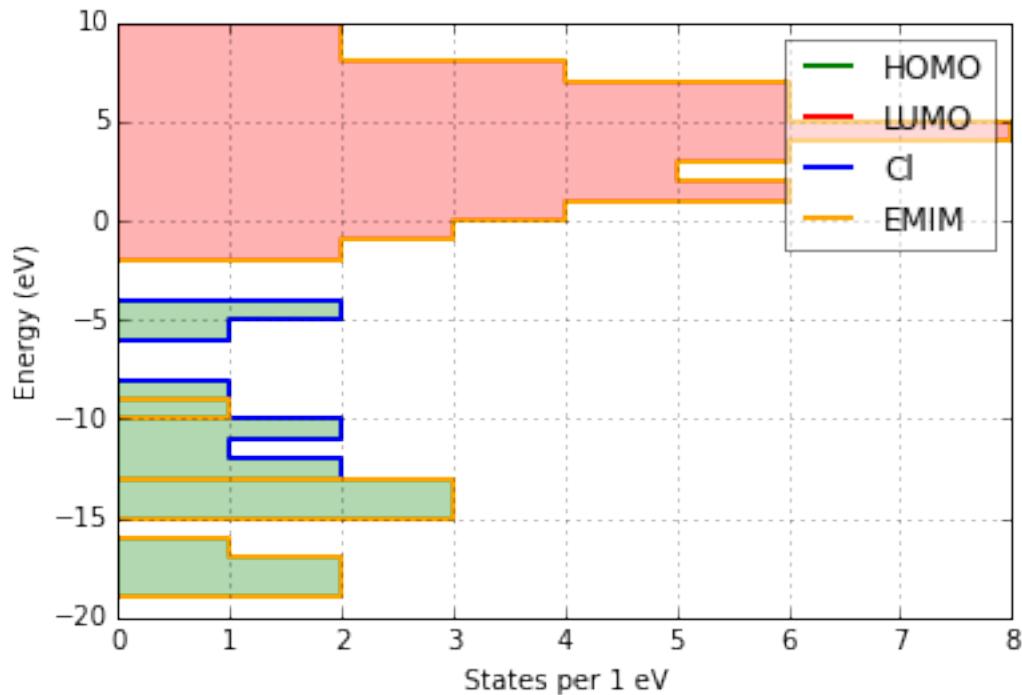


## Bonding Analysis

Using Second Order Perturbation Theory.

```
print 'H inter-bond energy = {} kJmol-1'.format(
    mol.calc_hbond_energy(eunits='kJmol-1', atom_groups=['emim', 'cl']))
print 'Other inter-bond energy = {} kJmol-1'.format(
    mol.calc_sopt_energy(eunits='kJmol-1', no_hbonds=True, atom_groups=['emim', 'cl']))
display(mol.show_sopt_bonds(min_energy=1, eunits='kJmol-1',
                            atom_groups=['emim', 'cl'],
                            no_hbonds=True,
                            rotations=[[0, 0, 90]]))
display(mol.show_hbond_analysis(cutoff_energy=5., alpha=0.6,
                                atom_groups=['emim', 'cl'],
                                rotations=[[0, 0, 90], [90, 0, 0]]))
```

```
H inter-bond energy = 111.7128 kJmol-1
Other inter-bond energy = 11.00392 kJmol-1
```

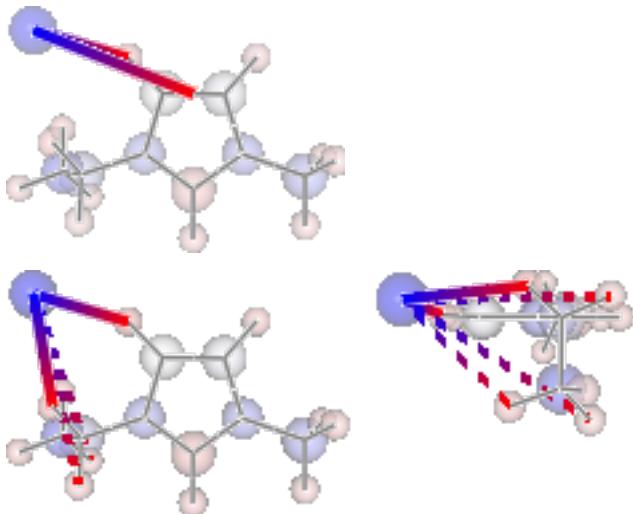

## 1.2.2 Multiple Computations Analysis

Multiple computations, for instance of different starting conformations, can be grouped into an `Analysis` class and analysed collectively.


```
analysis = pg.Analysis(folder_obj=folder)
errors = analysis.add_runs(headers=['Cation', 'Anion', 'Initial'],
                            values=[['emim'], ['cl'],
                                    ['B', 'BE', 'BM', 'F', 'FE']],
                            init_pattern='*{0}-{1}_{2}_init.com',
                            opt_pattern='*{0}-{1}_{2}_6-311+g-d-p-_gd3bj_opt*unfrz.log',
                            freq_pattern='*{0}-{1}_{2}_6-311+g-d-p-_gd3bj_freq*.log',
                            nbo_pattern='*{0}-{1}_{2}_6-311+g-d-p-_gd3bj_pop-nbo-full-* .log',
                            alignto=[3,2,1], atom_groups={'emim':range(1,20), 'cl':[20]},
                            ipython_print=True)
```

Reading data 5 of 5

## Molecular Comparison

```
fig, caption = analysis.plot_mol_images(mtype='optimised', max_cols=3,
                                         info_columns=['Cation', 'Anion', 'Initial'],
                                         rotations=[[0,0,90]])
print caption
```


Figure: (A) emim, cl, B, (B) emim, cl, BE, (C) emim, cl, BM, (D) emim, cl, F, (E) emim, cl, FE

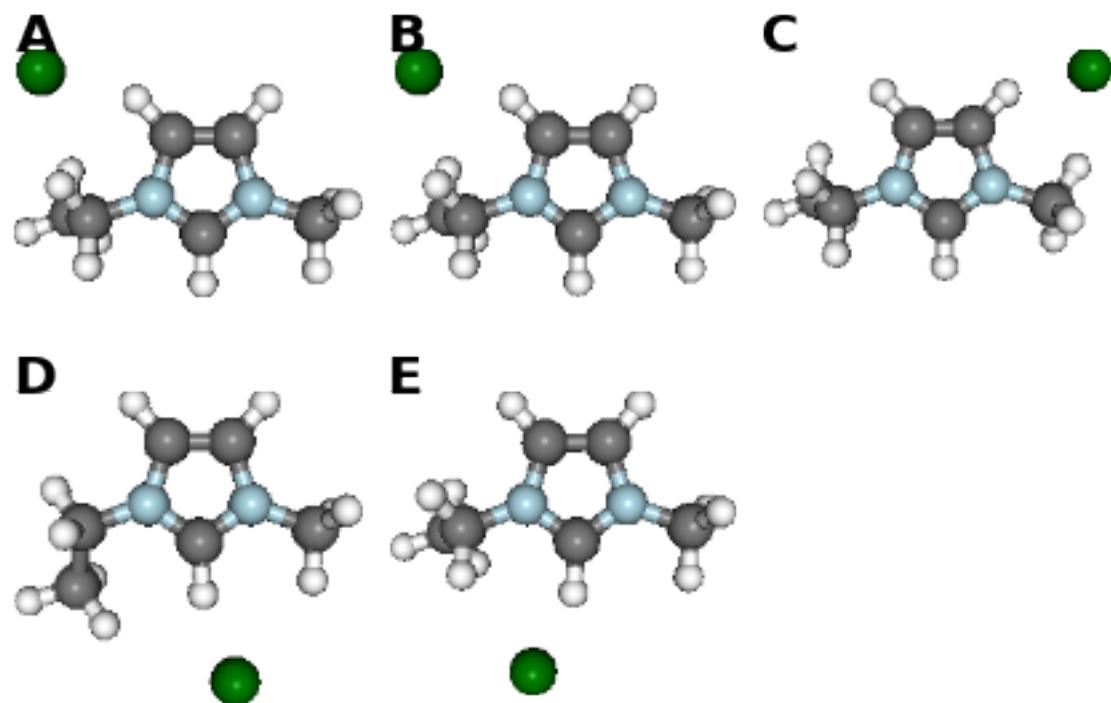

### Data Comparison

```
fig, caption = analysis.plot_mol_graphs(gttype='dos', max_cols=3,
                                         info_columns=['Cation', 'Anion', 'Initial'],
                                         atom_groups=['cl'], group_colors=['blue'],
                                         group_labels=['Cl'], group_fill=True,
                                         lbound=-20, ubound=10, legend_size=8)
print caption
```

Figure: (A) emim, cl, B, (B) emim, cl, BE, (C) emim, cl, BM, (D) emim, cl, F, (E) emim, cl, FE

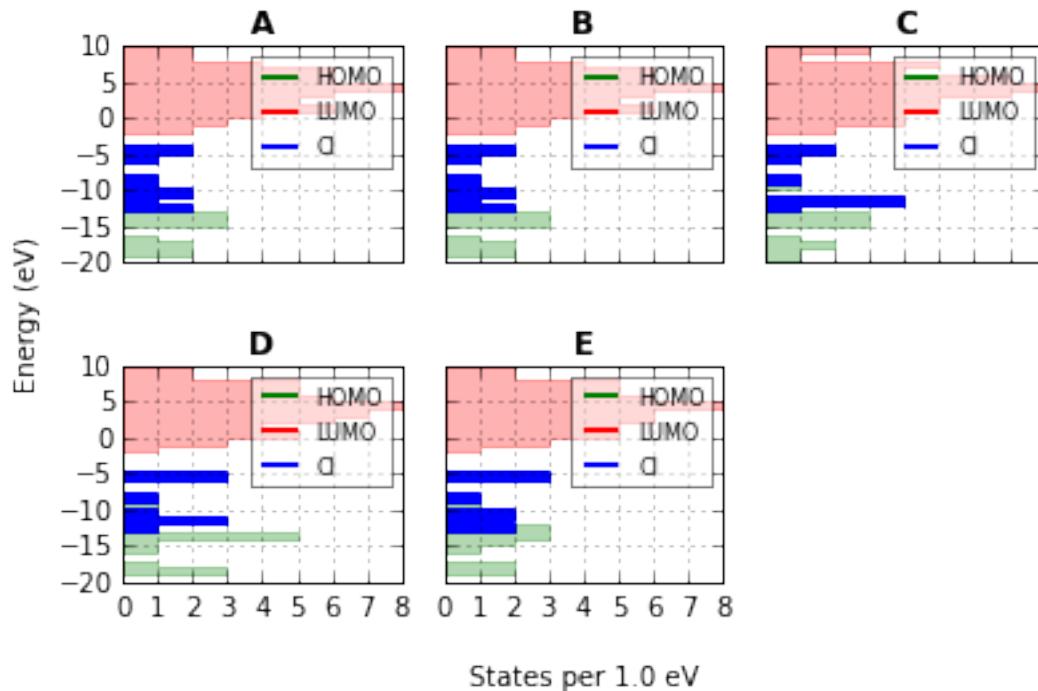

The methods mentioned for individual molecules can be applied to all or a subset of these computations.

```
analysis.add_mol_property_subset('Opt', 'is_optimised', rows=[2,3])
analysis.add_mol_property('Energy (au)', 'get_opt_energy', units='hartree')
analysis.add_mol_property('Cation chain, $\psi$', 'calc_dihedral_angle', [1, 4, 9, 10])
analysis.add_mol_property('Cation Charge', 'calc_nbo_charge', 'emim')
analysis.add_mol_property('Anion Charge', 'calc_nbo_charge', 'cl')
analysis.add_mol_property(['Anion-Cation, $r$', 'Anion-Cation, $\theta$', 'Anion-Cation, $\phi$'],
                        'calc_polar_coords_from_plane', 3, 2, 1, 20)
analysis.add_mol_property('Anion-Cation h-bond', 'calc_hbond_energy',
                        units='kJmol-1', atom_groups=['emim', 'cl'])
analysis.get_table(row_index=['Anion', 'Cation', 'Initial'],
                  column_index=['Cation', 'Anion', 'Anion-Cation'])
```

There is also an option (requiring pdflatex and ghostscript+imagemagik) to output the tables as a latex formatted image.


```
analysis.get_table(row_index=['Anion', 'Cation', 'Initial'],
                  column_index=['Cation', 'Anion', 'Anion-Cation'],
                  as_image=True, font_size=12)
```

Anion	Cation	Initial	Cation			Anion	Anion-Cation		
			Opt	Energy (au)	chain, $\psi$		Charge	Charge	r
cl	emim	B	-	-805.105	80.794	0.888	-0.888	0.420	-123.392
cl	emim	BE	-	-805.105	80.622	0.887	-0.887	0.420	-123.449
cl	emim	BM	True	-805.104	73.103	0.874	-0.874	0.420	124.121
cl	emim	F	True	-805.118	147.026	0.840	-0.840	0.420	10.393
cl	emim	FE	-	-805.117	85.310	0.851	-0.851	0.417	-13.254

## Multi-Variate Analysis

RadViz is a way of visualizing multi-variate data.

```
ax = analysis.plot_radviz_comparison('Anion', columns=range(4, 10))
```

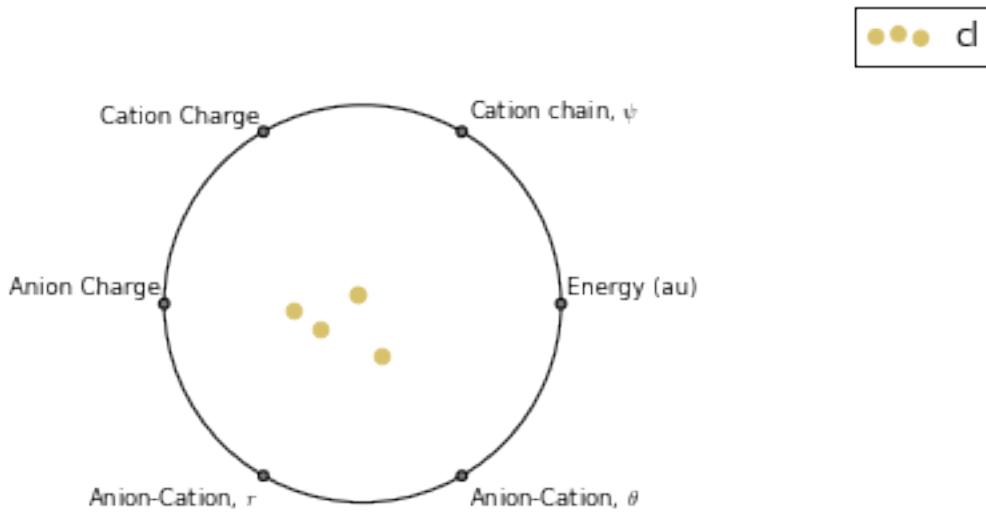

The KMeans algorithm clusters data by trying to separate samples into n groups of equal variance.

```
pg.utils.imgplot_kmean_groups(
    analysis, 'Anion', 'cl', 4, range(4, 10),
    output=['Initial'], mtype='optimised',
    rotations=[[0, 0, 90], [-90, 90, 0]],
    axis_length=0.3)
```

## Category 1:

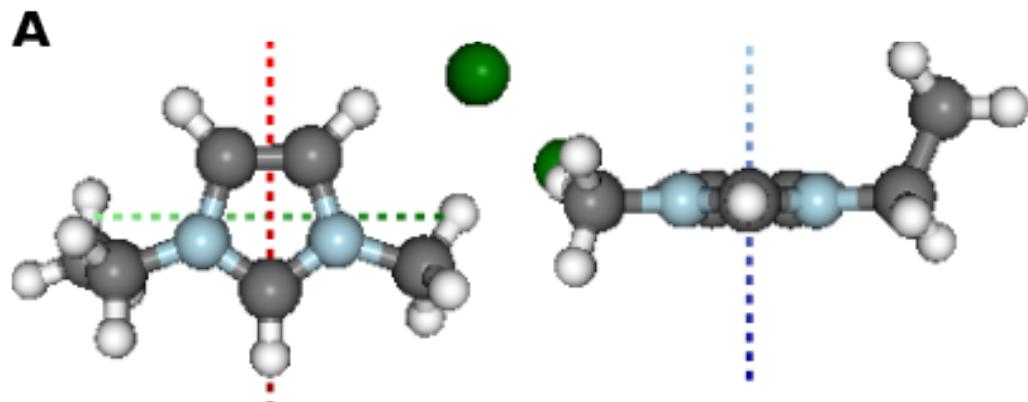


Figure: (A) BM

## Category 2:

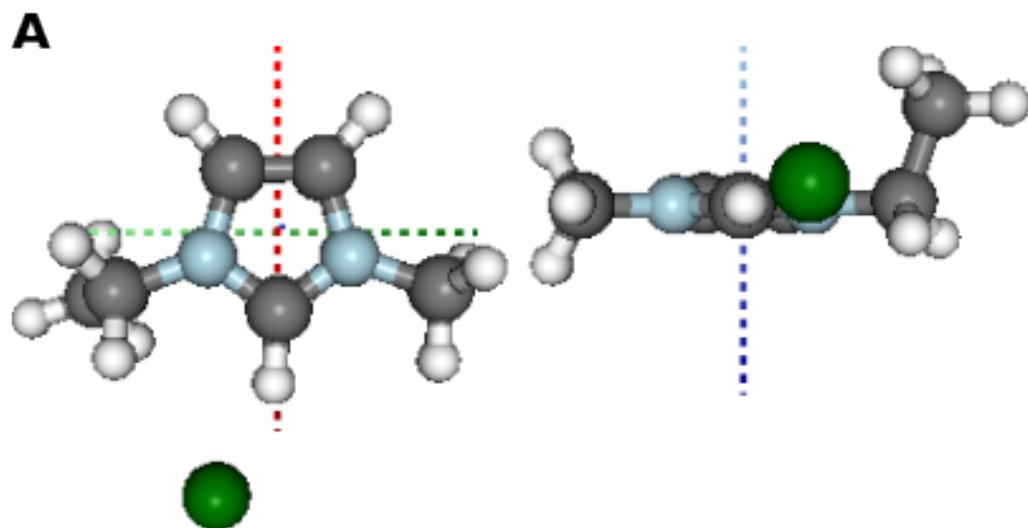


Figure: (A) FE

## Category 3:

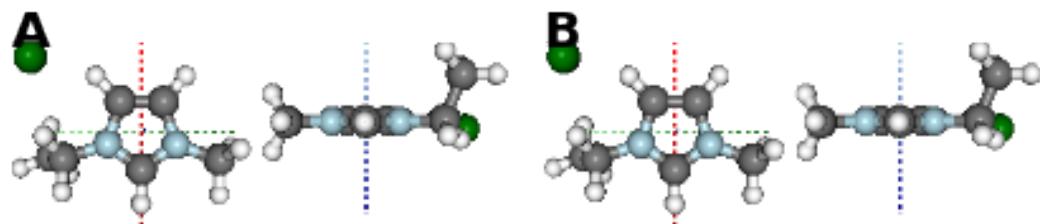


Figure: (A) B, (B) BE

## Category 4:


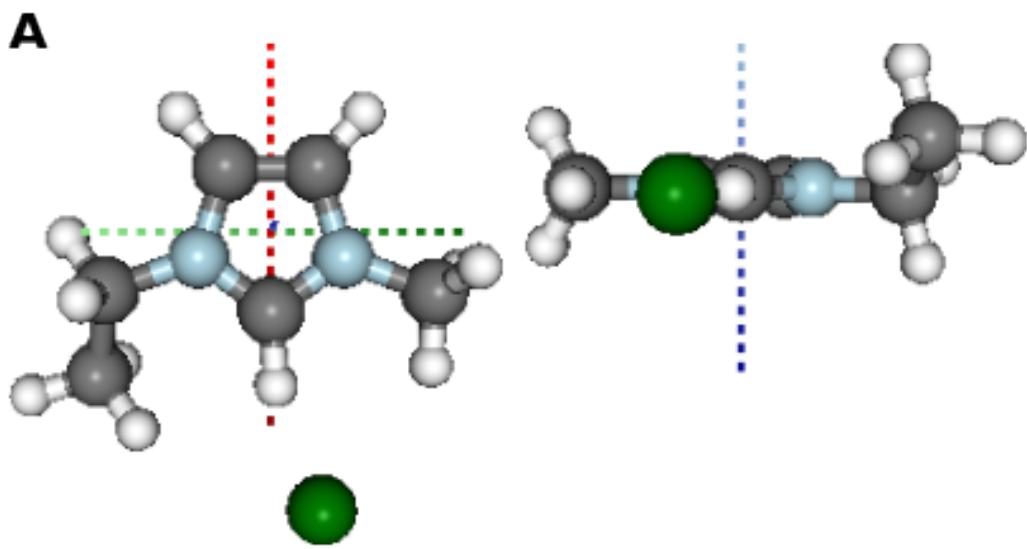


Figure: (A) F

### 1.2.3 Documentation (MS Word)

After analysing the computations, it would be reasonable to want to document some of our findings. This can be achieved by outputting individual figure or table images via the folder object.

```
file_path = folder.save_ipyimg(vdw, 'image_of_molecule')
Image(file_path)
```

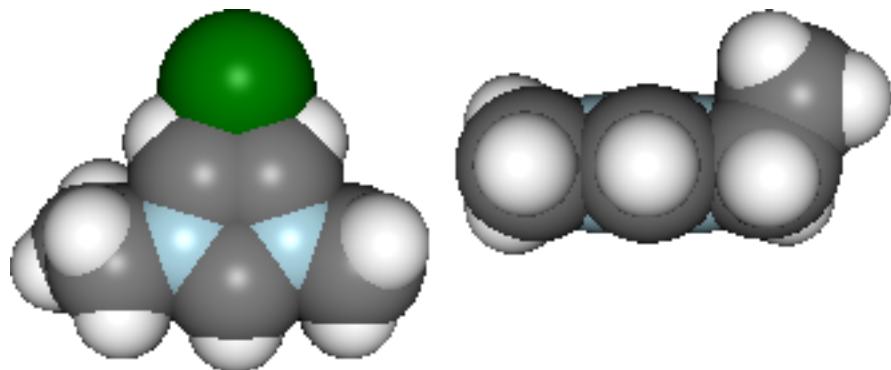

But you may also want to produce a more full record of your analysis, and this is where `python-docx` steps in. Building on this package the `pygauss` `MSDocument` class can produce a full document of your analysis.

```
import matplotlib.pyplot as plt
d = pg.MSDocument()
d.add_heading('A Pygauss Example Assessment', level=1)

d.add_paragraph('We have looked at the following aspects;')
d.add_list(['geometric conformers', 'electronic structure'])

d.add_heading('Geometric Conformers', level=2)
```

```
fig, caption = analysis.plot_mol_images(max_cols=2,
                                         rotations=[[90,0,0], [0,0,90]],
                                         info_columns=['Anion', 'Cation', 'Initial'])
d.add_mpl(fig, dpi=96, height=9)
plt.close()
d.add_markdown('*' + caption + '*')
d.add_paragraph()
df = analysis.get_table(columns=['Anion Charge', 'Cation Charge',
                                  'Energy (au)'],
                        row_index=['Anion', 'Cation', 'Initial'])
d.add_dataframe(df, incl_idx=True, style='Medium Shading 1 Accent 1')
d.add_markdown('**Table:** Analysis of Conformer Charge')

d.add_heading('Molecular Orbital Analysis', level=2)
fig, caption = analysis.plot_mol_graphs(gtype='dos', max_cols=3,
                                         info_columns=['Cation', 'Anion', 'Initial'],
                                         atom_groups=['cl'], group_colors=['blue'],
                                         group_labels=['Cl'], group_fill=True,
                                         lbound=-20, ubound=10, legend_size=8)
d.add_mpl(fig, dpi=96, height=9)
plt.close()
d.add_markdown('*' + caption + '*')

d.save('exmpl_assess.docx')
```

Which gives us the following:

## A Pygauss Example Assessment

We have looked at the following aspects;

- geometric conformers
- electronic structure

### Geometric Conformers

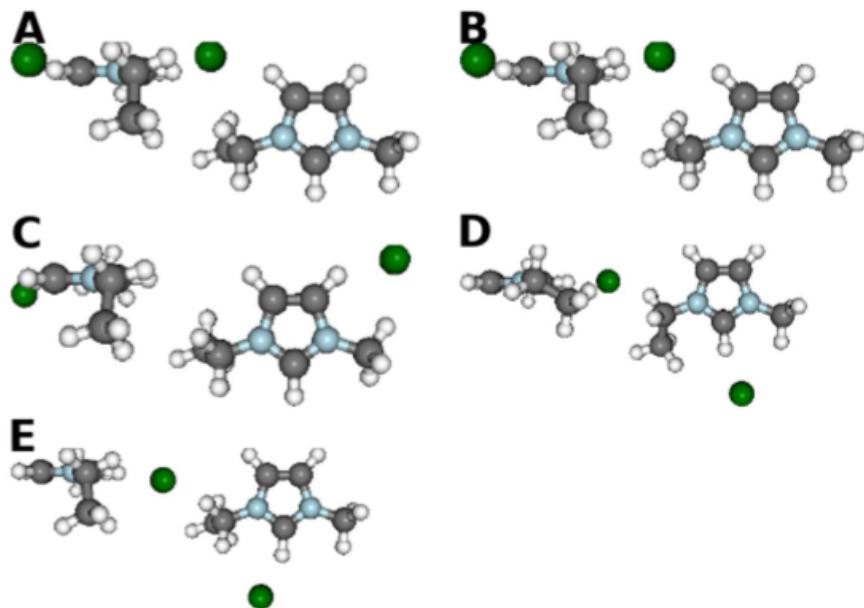


Figure: (A) cl, emim, B, (B) cl, emim, BE, (C) cl, emim, BM, (D) cl, emim, F, (E) cl, emim, FE

Anion	Cation	Initial	Anion Charge	Cation Charge	Energy (au)
cl	emim	B	-0.88755	0.88756	-805.11
cl	emim	BE	-0.88724	0.88723	-805.11
cl	emim	BM	-0.87435	0.87436	-805.1
cl	emim	F	-0.84037	0.84037	-805.12
cl	emim	FE	-0.85079	0.8508	-805.12

Table: Analysis of Conformer Charge

## Molecular Orbital Analysis

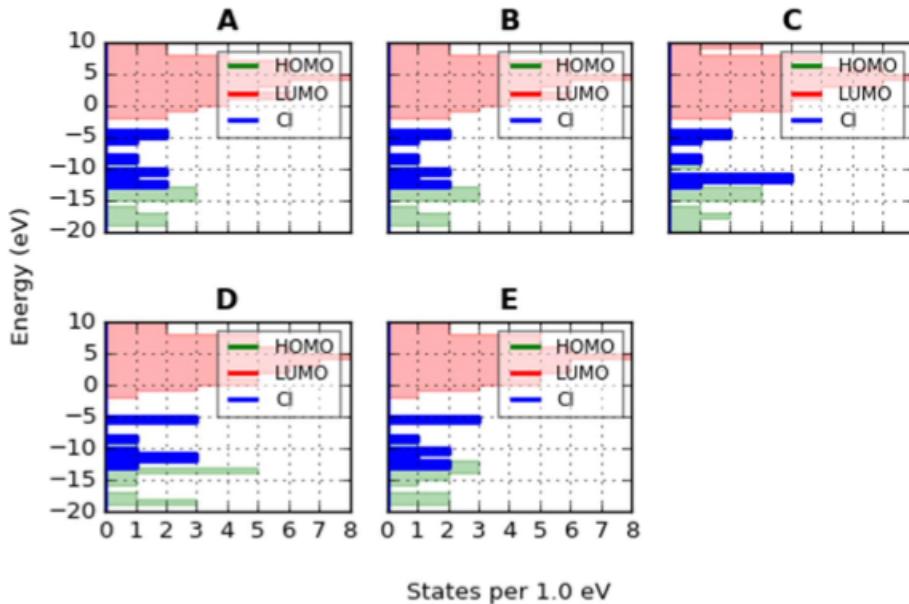


Figure: (A) emim, cl, B, (B) emim, cl, BE, (C) emim, cl, BM, (D) emim, cl, F, (E) emim, cl, FE

MORE TO COME!!

## 1.3 Project Status

### 1.3.1 Distribution

Conda	
PyPi	
Documents	

### 1.3.2 Development

GitHub	
Unit Testing	
Testing Coverage	
Documents	

## 1.4 Whats New

### 1.4.1 v0.5.0 - DoS Analysis & Multiprocessed I/O

- Density of States (DoS) and Partial Density of States (PDoS) analysis capabilities added.
- Addition of `pygauss.analysis.Analysis.plot_mol_graphs()` for data comparison
- `pygauss.analysis.Analysis.add_runs()` method now utilises the `multiprocessing` module for faster data input\*
- Improvement of API documentation

**Back-compatibility note:** replaced `plot_optimisation_E` and `get_optimisation_E` with

`pygauss.molecule.Molecule.get_opt_energy()` and `pygauss.molecule.Molecule.plot_opt_energy()`, to adhere with standard naming conventions.

\*multiprocessing not currently available in Windows or over SSH

### 1.4.2 v0.4.4 - Output to MS Word Documents

- added the `pygauss.docs` module for outputting analysis to documents
  - initially utilising the `docx.Document` within the `pygauss.docs.MSDocument`

### 1.4.3 v0.4.3 - Coninuous Integrated Testing

Addition of continuous integrated testing using [Travis](<https://travis-ci.org/>) and testing coverage analysis using [Coverall](<https://coveralls.io/>).

### 1.4.4 v0.4.2 - Addition of Documentation

addition of Sphinx documentation

### 1.4.5 v0.4.0 - Major Update

update includes:

- refactoring of data io
- improvement of second order perturbation theory analysis
- image output to table
- addition of unit test suite
- improvement of method documentation

breaks some back compatibility

## 1.4.6 v0.3.0 - File Input Over SSH

main update is the ability setup an ssh connection to a server, using the paramiko library, and parse analysis files over it. Also the ability to use wildcards (\*) in input file names.

some minor back compatibility breaks

## 1.4.7 v0.2.2 - Table Image Improvements

Improvements to Table to Image functionality on OSx

- added some fixes
- re-organised test modules

## 1.4.8 v0.2.1 - Latex Table Images

addition of functionality to output analysis tables as latex images for input into projects!

## 1.4.9 v0.2 - Initial working distribution

Working distribution of pygauss to be converted to first conda package

## 1.4.10 v0.1 - First Version

the first version

# 1.5 Whats To Come

## 1.5.1 Natural Bonding Orbital Visualisation

Visualise natural binding orbitals, in particular HOMO and LUMO

## 1.5.2 Molecular Image Labelling

with atom numbers, atom types, bond lengths, etc...

# 1.6 User API

## 1.6.1 pygauss.file\_io module

Created on Mon May 18 21:01:25 2015

@author: chris sewell

```
class pygauss.file_io.Folder(path, server=None, username=None, passwd=None)
Bases: object
```

an object intended to act as an entry point to a folder path

### Parameters

- **path** (*str*) – the path to the folder (absolute or relative)
- **server** (*str*) – the server name
- **username** (*str*) – the username to connect to the server
- **passwrd** (*str*) – server password, if not present it will be asked for during initialisation

### `__enter__()`

use with statement to open ssh connection once

### `__exit__(type, value, traceback)`

use with statement to open ssh connection once

### `active()`

if folder is active

### `get_path()`

get folder path

### `islocal()`

if folder is local

### `list_files(pattern=None, one_file=False)`

list files in folder

**Parameters** `pattern` (*str*) – a pattern the file must match that can include \* wildcards

### `read_file(file_name)`

return an open file ready for reading

### `save_ipyimg(img, img_name)`

a function for outputting an IPython Image to a file

### Parameters

- `img` (*IPython.display.Image*) – an IPYton image
- `img_name` (*str*) – the desired name of the file

### `save_mplfig(fig, fig_name, dpi=256, format='png')`

a function for outputting a matplotlib figure to a file

### Parameters

- `fig` (*matplotlib.figure.Figure*) – a Matplotlib figure
- `fig_name` (*str*) – the desired name of the file

### `save_pilimg(img, img_name)`

### `write_file(file_name, overwrite=False)`

return an open file ready for writing to

## `class pygauss.file_io.NoOutputFolder(*args, **kwargs)`

Bases: *pygauss.file\_io.Folder*

a folder object which will not output any data

### `save_ipyimg(*arg, **kwargs)`

### `save_mplfig(*arg, **kwargs)`

### `save_pilimg(*arg, **kwargs)`

### `write_file(*arg, **kwargs)`

## 1.6.2 pygauss.molecule module

Created on Fri May 01 21:24:31 2015

@author: chris

```
class pygauss.molecule.Molecule(folderpath='', init_fname=False, opt_fname=False,
                                 freq_fname=False, nbo_fname=False, pes_fname=False,
                                 fail_silently=False, atom_groups={}, alignto=[], server=None,
                                 username=None, passwd=None, folder_obj=None)
```

Bases: `object`

a class to analyse gaussian input/output of a single molecular geometry

### Parameters

- `folderpath` (`str`) – the folder path
- `init_fname` (`str`) – the intial geometry (.com) file
- `opt_fname` (`str or list of str`) – the optimisation log file
- `freq_fname` (`str`) – the frequency analysis log file
- `nbo_fname` (`str`) – the population analysis logfile
- `pes_fname` (`str`) – the potential energy scan logfile
- `fail_silently` (`bool`) – whether to raise an error if a file read fails (if True can use `get_init_read_errors` to see errors)
- `atom_groups` (`{str:[int, ...]}`) – groups of atoms that can be selected as a subset
- `alignto` (`[int, int, int]`) – the atom numbers to align the geometry to

### Notes

any of the file names can have wildcards (e.g. ‘filename\*.log’) in them, as long as this resolves to a single path in the directory

NB: nbo population analysis must be run with the GFInput flag to ensure data is output to the log file

```
add_frequency(file_name)
add_initialgeom(file_name)
add_nbo_analysis(file_name)
add_optimisation(file_name)
add_pes_analysis(file_names)
```

`calc_2plane_angle`(`p1, p2, optimisation=True`)  
return angle of planes

`calc_bond_angle`(`idxs, optimisation=True, mol=None`)  
Returns the angle in degrees between three points

`calc_dihedral_angle`(`idxs, optimisation=True, mol=None`)  
Returns the angle in degrees between four points

`calc_hbond_energy`(`atom_groups=[], eunits='kJmol-1'`)

`calc_min_dist`(`idx_list1, idx_list2, optimisation=True, units='nm', ignore_missing=True`)  
indexes start at 1

**calc\_nbo\_charge** (*atoms*=[])  
returns total charge of the atoms

**calc\_nbo\_charge\_center** (*p1*, *p2*, *p3*, *positive=True*, *units='nm'*, *atoms*=[])  
returns the distance r and angles theta, phi of the positive/negative charge center to the circumcenter of the plane formed by [*p1*, *p2*, *p3*]  
**the plane formed will have;** x-axis along *p1*, y-axis anticlock-wise towards *p2*, z-axis normal to the plane  
theta (azimuth) is the in-plane angle from the x-axis towards the y-axis phi (inclination) is the out-of-plane angle from the x-axis towards the z-axis

**calc\_opt\_trajectory** (*atom*, *plane*=[])  
calculate the trajectory of an atom as it is optimised, relative to a plane of three atoms

**calc\_polar\_coords\_from\_plane** (*p1*, *p2*, *p3*, *c*, *optimisation=True*, *units='nm'*)  
returns the distance r and angles theta, phi of atom *c* to the circumcenter of the plane formed by [*p1*, *p2*, *p3*]  
**the plane formed will have;** x-axis along *p1*, y-axis anticlock-wise towards *p2*, z-axis normal to the plane  
theta (azimuth) is the in-plane angle from the x-axis towards the y-axis phi (inclination) is the out-of-plane angle from the x-axis towards the z-axis

**calc\_sopt\_energy** (*atom\_groups*=[], *eunits='kJmol-1'*, *no\_hbonds=False*)  
calculate total energy of interactions between “filled” (donor) Lewis-type Natural Bonding Orbitals (NBOs) and “empty” (acceptor) non-Lewis NBOs, using Second Order Perturbation Theory

#### Parameters

- **eunits** (*str*) – the units of energy to return
- **atom\_groups** (*[list or str; list or str]*) – restrict interactions to between two lists (or identifiers) of atom indexes
- **no\_hbonds** (*bool*) – whether to ignore H-Bonds in the calculation

**Returns** **analysis** – a table of interactions

**Return type** `pandas.DataFrame`

**combine\_molecules** (*other\_mol*, *self\_atoms=False*, *other\_atoms=False*, *self\_rotation=[0, 0, 0]*,  
*other\_rotation=[0, 0, 0]*, *self\_transpose=[0, 0, 0]*, *other\_transpose=[0, 0, 0]*, *self\_opt=True*, *other\_opt=True*, *charge=None*, *multiplicity=None*,  
*out\_name=False*, *descript=',* *overwrite=False*, *active=False*, *represent='ball\_stick'*, *rotations=[[0.0, 0.0, 0.0]]*, *zoom=1.0*, *width=300*,  
*height=300*, *axis\_length=0*, *ipyimg=True*, *folder\_obj=None*)  
transpose in nanometers

**get\_atom\_group** (*group*)  
return list of atoms in group

**get\_basis\_descript** ()

**get\_basis\_funcs** ()

**get\_folder** ()  
return the Folder instance

**get\_freq\_analysis** ()  
return frequency analysis

**Returns** **data** – frequency data

**Return type** `pandas.DataFrame`

---

**get\_hbond\_analysis** (*min\_energy=0.0, atom\_groups=[], eunits='kJmol-1'*)  
EXPERIMENTAL! hydrogen bond analysis (DH—A), using Second Order Bond Perturbation Theory

#### Parameters

- **min\_energy** (*float*) – the minimum interaction energy to report
- **eunits** (*str*) – the units of energy to return
- **atom\_groups** (*[list or str, list or str]*) – restrict interactions to between two lists (or identifiers) of atom indexes

**Returns** **analysis** – a table of interactions

**Return type** `pandas.DataFrame`

#### Notes

uses a strict definition of a hydrogen bond as: interactions between “filled” (donor) Lewis-type Lone Pair (LP) NBOs and “empty” (acceptor) non-Lewis Bonding (BD) NBOs

**get\_init\_read\_errors()**

get read errors, recorded if fail\_silently was set to True on initialise

**get\_opt\_energy** (*units='eV', final=True*)

return the SCF optimisation energy

#### Parameters

- **units** (*str*) – the unit type of the energy
- **final** (*bool*) – return only the final optimised energy if True, else for all steps

**Returns** **energy** – dependant on final

**Return type** float or list of floats

**get\_orbital\_count()**

return number of orbitals

**get\_orbital\_energies** (*orbitals, eunits='eV'*)

the orbital energies for listed orbitals

#### Parameters

- **orbitals** (*int or iterable of ints*) – the orbital(s) to return energies for (starting at 1)
- **eunits** (*str*) – the units of energy

**Returns** **moenergies** – energy for each orbital

**Return type** `numpy.array`

**get\_orbital\_homo\_lumo()**

return orbital numbers of homo and lumo

**get\_run\_error** (*rtype='opt'*)

True if there were errors in the computation, else False

**get\_sopt\_analysis** (*eunits='kJmol-1', atom\_groups=[], charge\_info=False*)

interactions between “filled” (donor) Lewis-type Natural Bonding Orbitals (NBOs) and “empty” (acceptor) non-Lewis NBOs, using Second Order Perturbation Theory (SOPT)

#### Parameters

- **eunits** (*str*) – the units of energy to return
- **atom\_groups** (*[list or str, list or str]*) – restrict interactions to between two lists (or identifiers) of atom indexes
- **charge\_info** (*bool*) – include charge info for atoms (under headings ‘A\_Charges’ and ‘D\_Charges’)

**Returns** `analysis` – a table of interactions

**Return type** `pandas.DataFrame`

**is\_conformer** (*cutoff=0.0*)

False if any frequencies in the frequency analysis were negative

**is\_optimised()**

was the geometry optimised

**plot\_dos** (*eunits='eV', per\_energy=1.0, lbound=None, ubound=None, atom\_groups=[], group\_colors=[], group\_labels=[], group\_fill=False, legend\_size=10, ax=None*)  
plot Density of States

**eunits** [*str*] unit of energy

**per\_energy** [*float*] energy interval to group states by

**lbound** [*float*] lower bound energy

**ubound: float** upper bound energy

**atom\_groups** [*list of lists or strings*] atom groups to highlight

**group\_colors** [*list of str*] highlight colour for each atom group format adheres to matplotlib.colors

**group\_labels** [*list of str*] label for each atom group

**group\_fill** [*bool*] whether to fill colour for groups

**legend\_size** [*int*] the font size (in pts) for the legend

**ax** [*matplotlib.Axes*] an existing axes to plot the data on

**Returns** `plot` – plotted optimisation data

**Return type** `matplotlib.axes.Axes`

**plot\_freq\_analysis** (*color='blue', alpha=1, marker\_size=20, ax=None*)  
plot frequency analysis

**Returns** `data` – plotted frequency data

**Return type** `matplotlib.axes.Axes`

**plot\_opt\_energy** (*units='eV', linecolor='blue', ax=None*)  
plot SCF optimisation energy

**Returns** `data` – plotted optimisation data

**Return type** `matplotlib.axes.Axes`

**plot\_opt\_trajectory** (*atom, plane=[], ax\_lims=None, ax\_labels=False*)  
plot the trajectory of an atom as it is optimised, relative to a plane of three atoms

**plot\_pes\_scans** (*fixed\_atoms, eunits='kJmol-1', img\_pos='‘, rotation=[0.0, 0.0, 0.0], zoom=1, order=1*)  
plot Potential Energy Scan

**Parameters**

- **img\_pos** (<‘‘,‘local\_mins’,‘local\_maxs’,‘global\_min’,‘global\_max’>) – position image(s) of molecule conformation(s) on plot
- **rotation** ([*float*, *float*, *float*]) – rotation of molecule image(s)

**remove\_alignment\_atoms ()****set\_alignment\_atoms** (*idx1*, *idx2*, *idx3*)**show\_active\_orbital** (*orbital*, *iso\_value*=0.03, *alpha*=0.5, *bond\_color*=(255, 0, 0), *anti-bond\_color*=(0, 255, 0), *gbonds*=True)  
get interactive representation of orbital**Parameters**

- **orbital** (*int*) – the orbital to show (in range 1 to number of orbitals)
- **iso\_value** (*float*) – The value for which the function should be constant.
- **alpha** – alpha value of iso-surface
- **bond\_color** – color of bonding orbital surface in RGB format
- **antibond\_color** – color of anti-bonding orbital surface in RGB format
- **gbonds** (*bool*) – guess bonds between atoms (via distance)

**show\_hbond\_analysis** (*min\_energy*=0.0, *atom\_groups*=[], *cutoff\_energy*=0.0, *eunits*=‘kJmol-1’, *bondwidth*=5, *gbonds*=True, *active*=False, *represent*=‘ball\_stick’, *rotations*=[[0.0, 0.0, 0.0]], *zoom*=1.0, *width*=300, *height*=300, *axis\_length*=0, *lines*=[], *relative*=False, *minval*=-1, *maxval*=1, *alpha*=0.5, *transparent*=True, *ipyimg*=True)

EXPERIMENTAL! hydrogen bond analysis DH—A

For a hydrogen bond to occur there must be both a hydrogen donor and an acceptor present. The donor in a hydrogen bond is the atom to which the hydrogen atom participating in the hydrogen bond is covalently bonded, and is usually a strongly electronegative atom such as N, O, or F. The hydrogen acceptor is the neighboring electronegative ion or molecule, and must posses a lone electron pair in order to form a hydrogen bond.

Since the hydrogen donor is strongly electronegative, it pulls the covalently bonded electron pair closer to its nucleus, and away from the hydrogen atom. The hydrogen atom is then left with a partial positive charge, creating a dipole-dipole attraction between the hydrogen atom bonded to the donor, and the lone electron pair on the acceptor.

**show\_highlight\_atoms** (*atomlists*, *transparent*=False, *alpha*=0.7, *gbonds*=True, *active*=False, *optimised*=True, *represent*=‘vdw’, *rotations*=[[0.0, 0.0, 0.0]], *zoom*=1.0, *width*=300, *height*=300, *axis\_length*=0, *lines*=[], *ipyimg*=True)

show optimised geometry of molecule with certain atoms highlighted

**show\_initial** (*gbonds*=True, *active*=False, *represent*=‘vdw’, *rotations*=[[0.0, 0.0, 0.0]], *zoom*=1.0, *width*=300, *height*=300, *axis\_length*=0, *lines*=[], *ipyimg*=True)  
show initial geometry (before optimisation) of molecule coloured by atom type**show\_nbo\_charges** (*gbonds*=True, *active*=False, *relative*=False, *minval*=-1, *maxval*=1, *represent*=‘vdw’, *rotations*=[[0.0, 0.0, 0.0]], *zoom*=1.0, *width*=300, *height*=300, *axis\_length*=0, *lines*=[], *ipyimg*=True)

show optimised geometry coloured by charge from nbo analysis

```
show_optimisation(opt_step=False, gbonds=True, active=False, represent='vdw', rotations=[[0.0, 0.0, 0.0]], zoom=1.0, width=300, height=300, axis_length=0, lines=[], ipyimg=True)
    show optimised geometry of molecule coloured by atom type

show_sopt_bonds(min_energy=20.0, cutoff_energy=0.0, atom_groups=[], bondwidth=5, eunits='kJmol-1', no_hbonds=False, gbonds=True, active=False, represent='ball_stick', rotations=[[0.0, 0.0, 0.0]], zoom=1.0, width=300, height=300, axis_length=0, lines=[], relative=False, minval=-1, maxval=1, alpha=0.5, transparent=True, ipyimg=True)
    visualisation of interactions between “filled” (donor) Lewis-type Natural Bonding Orbitals (NBOs) and “empty” (acceptor) non-Lewis NBOs, using Second Order Perturbation Theory

yield_orbital_images(orbitals, iso_value=0.02, extents=(2, 2, 2), transparent=True, alpha=0.5, wireframe=True, bond_color=(255, 0, 0), antibond_color=(0, 255, 0), resolution=100, gbonds=True, represent='ball_stick', rotations=[[0.0, 0.0, 0.0]], zoom=1.0, width=300, height=300, axis_length=0, lines=[], ipyimg=True)
    yield orbital images
```

#### Parameters

- **orbitals** (*int or list of ints*) – the orbitals to show (in range 1 to number of orbitals)
- **iso\_value** (*float*) – The value for which the function should be constant.
- **extents** (*(float, float, float)*) – +/- x,y,z to extend the molecule geometry when constructing the surface
- **transparent=True** – whether iso-surface should be transparent (based on alpha value)
- **alpha** – alpha value of iso-surface
- **wireframe** – whether iso-surface should be wireframe (or solid)
- **bond\_color** – color of bonding orbital surface in RGB format
- **antibond\_color** – color of anti-bonding orbital surface in RGB format
- **resolution** (*int*) – The number of grid point to use for the surface. An high value will give better quality but lower performance.
- **gbonds** (*bool*) – guess bonds between atoms (via distance)
- **represent** (*str*) – representation of molecule ('none', 'wire', 'vdw' or 'ball\_stick')
- **zoom** (*float*) – zoom level of images
- **width** (*int*) – width of original images
- **height** (*int*) – height of original images (although width takes precedent)
- **axis\_length** (*float*) – length of x,y,z axes in negative and positive directions
- **lines** (*[start\_coord, end\_coord, start\_color, end\_color, width, dashed]*) – lines to add to image
- **ipyimg** (*bool*) – whether to return an IPython image, PIL image otherwise

**Returns** **mol** – an image of the molecule in the format specified by ipyimg

**Return type** IPython.display.Image or PIL.Image

pygauss.molecule.orbit\_z(*self, angle*)

### 1.6.3 pygauss.analysis module

```
class pygauss.analysis.Analysis(folderpath='', server=None, username=None, passwd=None,
                                 folder_obj=None, headers=[])
```

Bases: object

a class to analyse multiple computations

#### Parameters

- **folderpath** (*str*) – the folder directory storing the files to be analysed
- **server** (*str*) – the name of the server storing the files to be analysed
- **username** (*str*) – the username to connect to the server
- **passwd** (*str*) – server password, if not present it will be asked for during initialisation
- **headers** (*list*) – the variable categories for each computation

**add\_basic\_properties** (*props*=['basis', 'nbasis', 'optimised', 'conformer'])

adds columns giving info of basic run properties

**add\_mol\_property** (*name*, *method*, \**args*, \*\**kwargs*)

compute molecule property for all rows and create a data column

#### Parameters

- **name** (*str*) – what to name the data column
- **method** (*str*) – what molecule method to call
- **\*args** – arguments to pass to the molecule method
- **\*\*kwargs** – keyword arguments to pass to the molecule method

**add\_mol\_property\_subset** (*name*, *method*, *rows*=[], *filters*={}, *args*=[], *kwargs*={}, *relative\_to\_rows*=[])

compute molecule property for a subset of rows and create/add-to data column

#### Parameters

- **name** (*str or list of strings*) – name for output column (multiple if method outputs more than one value)
- **method** (*str*) – what molecule method to call
- **rows** (*list*) – what molecule rows to calculate the property for
- **filters** (*dict*) – filter for selecting molecules to calculate the property for
- **args** (*list*) – the arguments to pass to the molecule method
- **kwargs** (*dict*) – the keyword arguments to pass to the molecule method
- **relative\_to\_rows** (*list of ints*) – compute values relative to the summated value(s) of molecule at the rows listed

**add\_run** (*identifiers*={}, *init\_fname*=None, *opt\_fname*=None, *freq\_fname*=None, *nbo\_fname*=None, *alignto*=[], *atom\_groups*={}, *add\_if\_error*=False, *folder\_obj*=None)

add single Gaussian run input/outputs

**add\_runs** (*headers*=[], *values*=[], *init\_pattern*=None, *opt\_pattern*=None, *freq\_pattern*=None, *nbo\_pattern*=None, *add\_if\_error*=False, *alignto*=[], *atom\_groups*={}, *ipython\_print*=False, *folder\_obj*=None)

add multiple Gaussian run inputs/outputs

**calc\_kmean\_groups** (*category\_column*, *category\_name*, *groups*, *columns*=[], *rows*=[], *filters*={})  
calculate the kmeans grouping of rows

The KMeans algorithm clusters data by trying to separate samples in n groups of equal variance, minimizing a criterion known as the inertia or within-cluster sum-of-squares. This algorithm requires the number of clusters to be specified. It scales well to large number of samples and has been used across a large range of application areas in many different fields.

**copy** ()

**count\_runs** ()

get number of runs held in analysis

**folder**

The folder for gaussian runs

**get\_basic\_property** (*prop*, \**args*, \*\**kwargs*)

returns a series of a basic run property or nan if it is not available

**Parameters** **prop** (*str*) – can be ‘basis’, ‘nbasis’, ‘optimised’, ‘opt\_error’ or ‘conformer’

**get\_folder** ()

**get\_molecule** (*row*)

get molecule object coresponding to particular row

**get\_table** (*rows*=[], *columns*=[], *filters*={}, *precision*=4, *head*=False, *mol*=False, *row\_index*=[], *column\_index*=[], *as\_image*=False, *na\_rep*=‘-‘, *font\_size*=None, *width*=None, *height*=None, *unconfined*=False)

return pandas table of requested data in requested format

**rows** [integer or list of integers] select row ids

**columns** [string/integer or list of strings/integers] select column names/positions

**filters** [dict] filter for rows with certain value(s) in specific columns

**precision** [int] decimal precision of displayed values

**head** [int] return only first n rows

**mol** [bool] include column containing the molecule objects

**row\_index** [string or list of strings] columns to use as new index

**column\_index** [list of strings] strings to place in to higher order column indexes

**as\_image** [bool] output the table as an image (used pygauss.utils.df\_to\_img)

**na\_rep** [str] how to represent empty (nan) cells (if outputting image)

**width, height, unconfined** [int, int, bool] args for IPy Image

**Returns** **df** – a table of data

**Return type** `pandas.DataFrame`

**plot\_mol\_graphs** (*gtype*=‘energy’, *share\_plot*=False, *max\_cols*=1, *tick\_rotation*=0, *rows*=[], *filters*={}, *info\_columns*=[], *info\_incl\_id*=False, *start\_letter*=‘A’, *grid*=True, *sharex*=True, *sharey*=True, *legend\_size*=10, *color\_scheme*=‘jet’, *enunits*=‘eV’, *per\_energy*=1.0, *lbound*=None, *ubound*=None, *atom\_groups*=[], *group\_colors*=[], *group\_labels*=[], *group\_fill*=False)  
get a set of data plots for each molecule

**Parameters**

- **gtype** (*str*) – the type of plot, energy = optimisation energies, freq = frequency analysis, dos = Density of States,
- **share\_plot** (*bool*) – whether to plot all data on the same or separate axes
- **max\_cols** (*int*) – maximum columns on plots (share\_plot=False only)
- **tick\_rotation** (*int*) – rotation of x-axis labels
- **rows** (*int or list*) – index for the row of each molecule to plot (all plotted if empty)
- **filters** (*dict*) – {columns;values} to filter by
- **info\_columns** (*list of str*) – columns to use as info in caption
- **info\_incl\_id** (*bool*) – include molecule id number in labels
- **start\_letter** (*str*) – starting (capital) letter for labelling subplots (share\_plot=False only)
- **grid** (*bool*) – whether to include a grid in the axes
- **sharex** (*bool*) – whether to align x-axes (share\_plot=False only)
- **sharey** (*bool*) – whether to align y-axes (share\_plot=False only)
- **legend\_size** (*int*) – the font size (in pts) for the legend
- **color\_scheme** (*str*) – the scheme to use for each molecule (share\_plot=True only) according to [http://matplotlib.org/examples/color/colormaps\\_reference.html](http://matplotlib.org/examples/color/colormaps_reference.html)
- **eunits** (*str*) – the units of energy to use
- **per\_energy** (*float*) – energy interval to group states by (DoS only)
- **lbound** (*float*) – lower bound energy (DoS only)
- **ubound** (*float*) – upper bound energy (DoS only)
- **atom\_groups** (*list of lists or strings*) – atom groups to highlight (DoS only)
- **group\_colors** (*list of str*) – highlight colour for each atom group (DoS only) format adheres to matplotlib.colors
- **group\_labels** (*list of str*) – label for each atom group (DoS only)
- **group\_fill** (*bool*) – whether to fill colour for groups (DoS only)

### Returns

- **data** (*matplotlib.figure.Figure*) – plotted frequency data
- **caption** (*str*) – A caption describing each subplot, given info\_columns

```
plot_mol_images(mtype='optimised', max_cols=1, info_columns=[], info_incl_id=False, label_size=20, start_letter='A', rows=[], filters={}, align_to=[], rotations=[[0.0, 0.0, 0.0]], gbonds=True, represent='ball_stick', zoom=1.0, width=500, height=500, axis_length=0, relative=False, minval=-1, maxval=1, highlight=[], frame_on=False, eunits='kJmol-1', sopt_min_energy=20.0, sopt_cutoff_energy=0.0, atom_groups=[], alpha=0.5, transparent=False, hbondwidth=5, no_hbonds=False)
```

show molecules in matplotlib table of axes

### Parameters

- **mtype** – ‘initial’, ‘optimised’, ‘nbo’, ‘highlight’, ‘sopt’ or ‘hbond’
- **max\_cols** (*int*) – maximum columns in plot

- **info\_columns** (*list of str*) – columns to use as info in caption
- **info\_incl\_id** (*bool*) – include molecule id number in caption
- **label\_size** (*int*) – subplot label size (pts)
- **start\_letter** (*str*) – starting (capital) letter for labelling subplots
- **rows** (*int or list*) – index for the row of each molecule to plot (all plotted if empty)
- **filters** (*dict*) – {columns:values} to filter by
- **align\_to** (*[int, int, int]*) – align geometries to the plane containing these atoms
- **rotations** (*list of [float, float, float]*) – for each rotation set [x,y,z] an image will be produced
- **gbonds** (*bool*) – guess bonds between atoms (via distance)
- **represent** (*str*) – representation of molecule ('none', 'wire', 'vdw' or 'ball\_stick')
- **zoom** (*float*) – zoom level of images
- **width** (*int*) – width of original images
- **height** (*int*) – height of original images (although width takes precedent)
- **axis\_length** (*float*) – length of x,y,z axes in negative and positive directions
- **relative** (*bool*) – coloring of nbo atoms scaled to min/max values in atom set (for nbo mtype)
- **minval** (*float*) – coloring of nbo atoms scaled to absolute min (for nbo mtype)
- **maxval** (*float*) – coloring of nbo atoms scaled to absolute max (for nbo mtype)
- **highlight** (*list of lists*) – atom idxes to highlight (for highlight mtype)
- **eunits** (*str*) – the units of energy to return (for sopt/hbond mtype)
- **sopt\_min\_energy** (*float*) – minimum energy to show (for sopt/hbond mtype)
- **sopt\_cutoff\_energy** (*float*) – energy below which bonds will be dashed (for sopt mtype)
- **alpha** (*float*) – alpha color value of geometry (for sopt/hbond mtypes)
- **transparent** (*bool*) – whether atoms should be transparent (for sopt/hbond mtypes)
- **hbondwidth** (*float*) – width of lines depicting interaction (for hbond mtypes)
- **atom\_groups** (*[list or str; list or str]*) – restrict interactions to between two lists (or identifiers) of atom indexes (for sopt/hbond mtypes)
- **no\_hbonds** (*bool*) – whether to ignore H-Bonds in the calculation (for sopt only)
- **frame\_on** (*bool*) – whether to show frame around each image

#### Returns

- **fig** (*matplotlib.figure.Figure*) – A figure containing subplots for each molecule image
- **caption** (*str*) – A caption describing each subplot, given info\_columns

```
plot_radviz_comparison(category_column, columns=[], rows=[], filters={}, point_size=30,  
                        **kwargs)  
return plot axis of radviz graph
```

RadViz is a way of visualizing multi-variate data. It is based on a simple spring tension minimization algorithm. Basically you set up a bunch of points in a plane. In our case they are equally spaced on a

unit circle. Each point represents a single attribute. You then pretend that each sample in the data set is attached to each of these points by a spring, the stiffness of which is proportional to the numerical value of that attribute (they are normalized to unit interval). The point in the plane, where our sample settles to (where the forces acting on our sample are at an equilibrium) is where a dot representing our sample will be drawn. Depending on which class that sample belongs it will be colored differently.

```
remove_columns (columns)
remove_non_conformers (cutoff=0.0)
    removes runs with negative frequencies
remove_non_optimised ()
    removes runs that were not optimised
remove_rows (rows)
    remove one or more rows of molecules

Parameters rows (int or list of ints:) – the rows to remove

set_folder (folderpath='', server=None, username=None, passwd=None)

yield_mol_images (rows=[], filters={}, mtype='optimised', align_to=[], rotations=[[0.0, 0.0, 0.0]], gbonds=True, represent='ball_stick', zoom=1.0, width=300, height=300, axis_length=0, relative=False, minval=-1, maxval=1, highlight=[], active=False, sopt_min_energy=20.0, sopt_cutoff_energy=0.0, atom_groups=[], alpha=0.5, transparent=False, hbondwidth=5, eunits='kJmol-1', no_hbonds=False, ipyimg=True)
    yields molecules

Parameters

- mtype – ‘initial’, ‘optimised’, ‘nbo’, ‘highlight’, ‘sopt’ or ‘hbond’
- info_columns (list of str) – columns to use as info in caption
- max_cols (int) – maximum columns in plot
- label_size (int) – subplot label size (pts)
- start_letter (str) – starting (capital) letter for labelling subplots
- save_fname (str) – name of file, if you wish to save the plot to file
- rows (int or list) – index for the row of each molecule to plot (all plotted if empty)
- filters (dict) – {columns:values} to filter by
- align_to ([int, int, int]) – align geometries to the plane containing these atoms
- rotations (list of [float, float, float]) – for each rotation set [x,y,z] an image will be produced
- gbonds (bool) – guess bonds between atoms (via distance)
- represent (str) – representation of molecule (‘none’, ‘wire’, ‘vdw’ or ‘ball_stick’)
- zoom (float) – zoom level of images
- width (int) – width of original images
- height (int) – height of original images (although width takes precedent)
- axis_length (float) – length of x,y,z axes in negative and positive directions
- relative (bool) – coloring of nbo atoms scaled to min/max values in atom set (for nbo mtype)

```

- **minval** (*float*) – coloring of nbo atoms scaled to absolute min (for nbo mtype)
- **maxval** (*float*) – coloring of nbo atoms scaled to absolute max (for nbo mtype)
- **highlight** (*list of lists*) – atom idxes to highlight (for highlight mtype)
- **eunits** (*str*) – the units of energy to return (for sopt/hbond mtype)
- **sopt\_min\_energy** (*float*) – minimum energy to show (for sopt/hbond mtype)
- **sopt\_cutoff\_energy** (*float*) – energy below which bonds will be dashed (for sopt mtype)
- **alpha** (*float*) – alpha color value of geometry (for highlight/sopt/hbond mtypes)
- **transparent** (*bool*) – whether atoms should be transparent (for highlight/sopt/hbond mtypes)
- **hbondwidth** (*float*) – width of lines depicting interaction (for hbond mtypes)
- **atom\_groups** (*[list or str; list or str]*) – restrict interactions to between two lists (or identifiers) of atom indexes (for sopt/hbond mtypes)
- **no\_hbonds** (*bool*) – whether to ignore H-Bonds in the calculation
- **ipyimg** (*bool*) – whether to return an IPython image, PIL image otherwise
- **Yields** –
- -----
- **indx** (*int*) – the row index of the molecule
- **mol** (*IPython.display.Image or PIL.Image*) – an image of the molecule in the format specified by ipyimg

`pygauss.analysis.unpack_and_make_molecule(val_dict)`

## 1.6.4 pygauss.docs module

Created on Tue Jun 16 15:52:53 2015

@author: chris sewell

**class** `pygauss.docs.MSDocument` (*docx=None*)  
Bases: `object`

a class to output a Microsoft Word Document

inherited api details for `docx.Document` can be found at; <https://python-docx.readthedocs.org/en/latest/api/document.html>

**Parameters** `docx` (*str or file-like object*) – can be either a path to a .docx file (a string) or a file-like object. If docx is missing or None, the built-in default document “template” is loaded.

`__dir__()`

required to have docx.Document methods in ipython tab completion

`__getattr__(name)`

required to get docx.Document methods

`add_dataframe(df, incl_idx=True, autofit=True, sig_figures=5, style='Medium List 1 Accent 1')`  
add dataframe as a table

`add_list(text_list=[], numbered=False)`  
adds a list

---

```
add_markdown(text='', style='Body Text')
    adds a paragraph to the document, allowing for markdown style bold and italic text

add_mp1(fig, dpi=None, width=None, height=None, pad_inches=0.2)
    add matplotlib figure to the document, width/height in cm Amount of padding around the figure
```

## 1.6.5 pygauss.isosurface module

Created on Mon May 25 15:23:49 2015

@author: chris based on add\_isosurface function from chemview

```
pygauss.isosurface.calc_normals(verts,faces)
    from: https://sites.google.com/site/dlampetest/python/calculating-normals-of-a-triangle-mesh-using-numpy

pygauss.isosurface.get_isosurface(coordinates, function, isolevel=0.03, color=(255, 0, 0, 255),
                                         extents=(5, 5, 5), resolution=100)
    Add an isosurface to the current scene.
```

### Parameters

- **coordinates** (`numpy.array`) – the coordinates of the system
- **function** (`func`) – A function that takes x, y, z coordinates as input and is broadcastable using numpy. Typically simple functions that involve standard arithmetic operations and functions such as `x**2 + y**2 + z**2` or `np.exp(x**2 + y**2 + z**2)` will work. If not sure, you can first pass the function through `numpy.vectorize`. Example: `mv.add_isosurface(np.vectorize(f))`
- **isolevel** (`float`) – The value for which the function should be constant.
- **color** ((`int, int, int, int`)) – The color given in RGBA format
- **extents** ((`float, float, float`)) – +/- x,y,z to extend the molecule geometry when constructing the surface
- **resolution** (`int`) – The number of grid point to use for the surface. An high value will give better quality but lower performance.

```
pygauss.isosurface.my_calc_normals(verts,faces)
    doesn't work
```

```
pygauss.isosurface.normalize_v3(arr)
    Normalize a numpy array of 3 component vectors shape=(n,3)
```

## 1.6.6 pygauss.utils module

Created on Thu Apr 30 01:08:30 2015

@author: chris

```
pygauss.utils.circumcenter(pts)
    Computes the circumcenter and circumradius of M, N-dimensional points (1 <= M <= N + 1 and N >= 1). The points are given by the rows of an (M)x(N) dimensional matrix pts.
```

Returns a tuple (center, radius) where center is a column vector of length N and radius is a scalar.

In the case of four points in 3D, pts is a 4x3 matrix arranged as:

`pts = [ x0 y0 z0 ] [ x1 y1 z1 ] [ x2 y2 z2 ] [ x3 y3 z3 ]`

with return value ([ cx cy cz ], R)

Uses an extension of the method described here: <http://www.ics.uci.edu/~eppstein/junkyard/circumcenter.html>

`pygauss.utils.circumcenter_barycoords (pts)`

Computes the barycentric coordinates of the circumcenter M, N-dimensional points ( $1 \leq M \leq N + 1$  and  $N \geq 1$ ). The points are given by the rows of an  $(M) \times (N)$  dimensional matrix pts.

Uses an extension of the method described here: <http://www.ics.uci.edu/~eppstein/junkyard/circumcenter.html>

`pygauss.utils.df_to_img (df, na_rep='-', other_temp=None, font_size=None, width=None, height=None, unconfined=False)`

converts a pandas Dataframe to an IPython image

**na\_rep** [str] how to represent empty (nan) cells

**other\_temp** [str] a latex template to use for the table other than the default

The function uses pandas to convert the dataframe to a latex table, applies a template, converts to a PDF, converts to an image, and finally return the image

to use this function you will need the pdflatex executable from tex distribution, the convert executable from imagemagick, which also requires ghostscript; <http://www.ghostscript.com/download/gsdnld.html> <http://www.imagemagick.org/script/binary-releases.php>

NB: on Windows some issues were found with convert being an already existing application. To overcome this change its filename and use the im\_name variable.

`pygauss.utils.imgplot_kmean_groups (analysis, category, cat_name, groups, columns, filters={}, output=[], max_cols=2, **kwargs)`

`pygauss.utils.is_wellcentered (pts, tol=1e-08)`

Determines whether the M points in N dimensions define a well-centered simplex.

`pygauss.utils.set_imagik_exe (name)`

### License

---

Pygauss is released under the [GNU GPLv3](#) and its main developer is Chris Sewell.



**p**

`pygauss.analysis`, 27  
`pygauss.docs`, 32  
`pygauss.file_io`, 19  
`pygauss.isosurface`, 33  
`pygauss.molecule`, 21  
`pygauss.utils`, 33



## Symbols

`__dir__()` (pygauss.docs.MSDocument method), 32  
`__enter__()` (pygauss.file\_io.Folder method), 20  
`__exit__()` (pygauss.file\_io.Folder method), 20  
`__getattr__()` (pygauss.docs.MSDocument method), 32

## A

`active()` (pygauss.file\_io.Folder method), 20  
`add_basic_properties()` (pygauss.analysis.Analysis method), 27  
`add_dataframe()` (pygauss.docs.MSDocument method), 32  
`add_frequency()` (pygauss.molecule.Molecule method), 21  
`add_initialgeom()` (pygauss.molecule.Molecule method), 21  
`add_list()` (pygauss.docs.MSDocument method), 32  
`add_markdown()` (pygauss.docs.MSDocument method), 32  
`add_mol_property()` (pygauss.analysis.Analysis method), 27  
`add_mol_property_subset()` (pygauss.analysis.Analysis method), 27  
`add_mpl()` (pygauss.docs.MSDocument method), 33  
`add_nbo_analysis()` (pygauss.molecule.Molecule method), 21  
`add_optimisation()` (pygauss.molecule.Molecule method), 21  
`add_pes_analysis()` (pygauss.molecule.Molecule method), 21  
`add_run()` (pygauss.analysis.Analysis method), 27  
`add_runs()` (pygauss.analysis.Analysis method), 27  
`Analysis` (class in pygauss.analysis), 27

## C

`calc_2plane_angle()` (pygauss.molecule.Molecule method), 21  
`calc_bond_angle()` (pygauss.molecule.Molecule method), 21

`calc_dihedral_angle()` (pygauss.molecule.Molecule method), 21  
`calc_hbond_energy()` (pygauss.molecule.Molecule method), 21  
`calc_kmean_groups()` (pygauss.analysis.Analysis method), 27  
`calc_min_dist()` (pygauss.molecule.Molecule method), 21  
`calc_nbo_charge()` (pygauss.molecule.Molecule method), 21  
`calc_nbo_charge_center()` (pygauss.molecule.Molecule method), 22  
`calc_normals()` (in module pygauss.isosurface), 33  
`calc_opt_trajectory()` (pygauss.molecule.Molecule method), 22  
`calc_polar_coords_from_plane()` (pygauss.molecule.Molecule method), 22  
`calc_sopt_energy()` (pygauss.molecule.Molecule method), 22  
`circumcenter()` (in module pygauss.utils), 33  
`circumcenter_barycoords()` (in module pygauss.utils), 34  
`combine_molecules()` (pygauss.molecule.Molecule method), 22  
`copy()` (pygauss.analysis.Analysis method), 28  
`count_runs()` (pygauss.analysis.Analysis method), 28

## D

`df_to_img()` (in module pygauss.utils), 34

## F

`Folder` (class in pygauss.file\_io), 19  
`folder` (pygauss.analysis.Analysis attribute), 28

## G

`get_atom_group()` (pygauss.molecule.Molecule method), 22  
`get_basic_property()` (pygauss.analysis.Analysis method), 28  
`get_basis_descript()` (pygauss.molecule.Molecule method), 22  
`get_basis_funcs()` (pygauss.molecule.Molecule method), 22

get\_folder() (pygauss.analysis.Analysis method), 28  
get\_folder() (pygauss.molecule.Molecule method), 22  
get\_freq\_analysis() (pygauss.molecule.Molecule method), 22  
get\_hbond\_analysis() (pygauss.molecule.Molecule method), 22  
get\_init\_read\_errors() (pygauss.molecule.Molecule method), 23  
get\_isosurface() (in module pygauss.isosurface), 33  
get\_molecule() (pygauss.analysis.Analysis method), 28  
get\_opt\_energy() (pygauss.molecule.Molecule method), 23  
get\_orbital\_count() (pygauss.molecule.Molecule method), 23  
get\_orbital\_energies() (pygauss.molecule.Molecule method), 23  
get\_orbital\_homo\_lumo() (pygauss.molecule.Molecule method), 23  
get\_path() (pygauss.file\_io.Folder method), 20  
get\_run\_error() (pygauss.molecule.Molecule method), 23  
get\_sopt\_analysis() (pygauss.molecule.Molecule method), 23  
get\_table() (pygauss.analysis.Analysis method), 28

|

imgplot\_kmean\_groups() (in module pygauss.utils), 34  
is\_conformer() (pygauss.molecule.Molecule method), 24  
is\_optimised() (pygauss.molecule.Molecule method), 24  
is\_wellcentered() (in module pygauss.utils), 34  
islocal() (pygauss.file\_io.Folder method), 20

L

list\_files() (pygauss.file\_io.Folder method), 20

M

Molecule (class in pygauss.molecule), 21  
MSDocument (class in pygauss.docs), 32  
my\_calc\_normals() (in module pygauss.isosurface), 33

N

NoOutputFolder (class in pygauss.file\_io), 20  
normalize\_v3() (in module pygauss.isosurface), 33

O

orbit\_z() (in module pygauss.molecule), 26

P

plot\_dos() (pygauss.molecule.Molecule method), 24  
plot\_freq\_analysis() (pygauss.molecule.Molecule method), 24  
plot\_mol\_graphs() (pygauss.analysis.Analysis method), 28  
plot\_mol\_images() (pygauss.analysis.Analysis method), 29  
plot\_opt\_energy() (pygauss.molecule.Molecule method), 24  
plot\_opt\_trajectory() (pygauss.molecule.Molecule method), 24  
plot\_pes\_scans() (pygauss.molecule.Molecule method), 24  
plot\_radviz\_comparison() (pygauss.analysis.Analysis method), 30  
pygauss.analysis (module), 27  
pygauss.docs (module), 32  
pygauss.file\_io (module), 19  
pygauss.isosurface (module), 33  
pygauss.molecule (module), 21  
pygauss.utils (module), 33

R

read\_file() (pygauss.file\_io.Folder method), 20  
remove\_alignment\_atoms() (pygauss.molecule.Molecule method), 25  
remove\_columns() (pygauss.analysis.Analysis method), 31  
remove\_non\_conformers() (pygauss.analysis.Analysis method), 31  
remove\_non\_optimised() (pygauss.analysis.Analysis method), 31  
remove\_rows() (pygauss.analysis.Analysis method), 31

S

save\_ipyimg() (pygauss.file\_io.Folder method), 20  
save\_ipyimg() (pygauss.file\_io.NoOutputFolder method), 20  
save\_mplfig() (pygauss.file\_io.Folder method), 20  
save\_mplfig() (pygauss.file\_io.NoOutputFolder method), 20  
save\_pilimg() (pygauss.file\_io.Folder method), 20  
save\_pilimg() (pygauss.file\_io.NoOutputFolder method), 20  
set\_alignment\_atoms() (pygauss.molecule.Molecule method), 25  
set\_folder() (pygauss.analysis.Analysis method), 31  
set\_imagik\_exe() (in module pygauss.utils), 34  
show\_active\_orbital() (pygauss.molecule.Molecule method), 25  
show\_hbond\_analysis() (pygauss.molecule.Molecule method), 25  
show\_highlight\_atoms() (pygauss.molecule.Molecule method), 25  
show\_initial() (pygauss.molecule.Molecule method), 25  
show\_nbo\_charges() (pygauss.molecule.Molecule method), 25  
show\_optimisation() (pygauss.molecule.Molecule method), 25

show\_sopt\_bonds() (pygauss.molecule.Molecule method), 26

## U

unpack\_and\_make\_molecule() (in module pygauss.analysis), 32

## W

write\_file() (pygauss.file\_io.Folder method), 20

write\_file() (pygauss.file\_io.NoOutputFolder method), 20

## Y

yield\_mol\_images() (pygauss.analysis.Analysis method), 31

yield\_orbital\_images() (pygauss.molecule.Molecule method), 26